

ENESEAL[®] MP/HS

Water-Based Penetrant / Weather Barrier For Horizontal Masonry, Concrete, Brick & Stone

- UV Resistant
- Water-Based
- Breathable
- Invisible
- Environmentally Safe

ENESEAL[®] MP/HS is a single component, water-based, ultra-low viscosity weather barrier which dries to a completely invisible, water repellent masonry sealer. It provides extraordinary weather protection to virtually all types of concrete, masonry and mineral surfaces.

ENESEAL[®] MP/HS forms a hydrophobic barrier inside masonry pores that repels water and water-borne salts. This significantly reduces the damaging effects of moisture penetration into concrete and masonry, such as surface scaling, freeze-thaw cracking and corrosion of reinforcing steel.

The invisible barrier forms below masonry surfaces to depths of up to 3/4 inch and, therefore, will not wear away as a result of surface traffic and/or harsh weather conditions. This barrier is also breathable – allowing water vapor to escape from inside the concrete or masonry while dramatically reducing liquid water penetration into the substrate.



Protects...

- Concrete
- Cement
- Masonry
- Stone
- Brick
- Block
- Mortar
- Clay Tile
- ...and more

Before rain...



After rain...

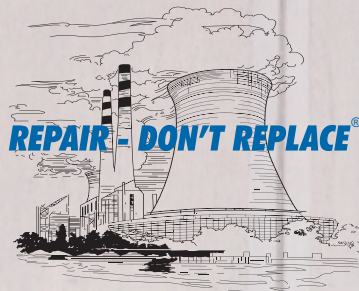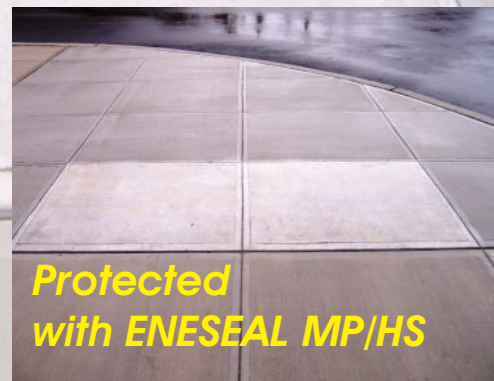

ENECON[®] Corporation
The Fluid Flow
Systems Specialists.
www.enecon.com

Toll Free: 888-4-ENECON (888-436-3266)

Tel: 516 349 0022 · Fax: 516 349 5522

info@enecon.com

6 Platinum Court · Medford, NY 11763-2251

Technical Data

Unit Size:	20 kg
Color:	White liquid
Odor:	None
Applied Appearance:	Invisible
Vehicle Type:	Water based siloxane / silane
Shelf Life:	2 years
Coverage Rate:	Approx. 60 sq. ft. (5.6 sq. m.) / kg depending on porosity, texture, etc.
Rain Resistance:	6 hours minimum (77° F / 25° C @ 50% relative humidity)
Full Weather Resistance:	7 days (77° F / 25° C @ 50% relative humidity)

Physical Properties

Water Absorption:	Concrete brick - 1.6% Red clay brick - 0.3% (ASTM C-642)
Depth of Penetration:	Concrete brick - 1/4 inch to 1/2 inch Red clay brick - 1/3 inch to 3/4 inch (OHD L-34)
Scaling Resistance:	ENESEAL® MP/HS coated concrete - rating "0 - no scaling" at 50 cycles. Uncoated concrete - rating "5 - severe scaling" at 25 cycles. (ASTM C-672)
Moisture Vapor Transmission:	100%
VOC:	30 gms / ltr (ASTM D-2369)
Freeze Thaw Resistance of Liquid Product:	50 cycles (0° F) - No effect
Surface Appearance After Application:	Unchanged
UV Resistance:	Excellent

Using ENESEAL® MP/HS

Surface Preparation - The substrate should be structurally sound and free of any coatings, sealants or surface contaminants such as dirt, grease, oil, etc. For optimum penetration, ENESEAL® MP/HS should only be applied to dry surfaces and should never be applied where liquid water is present. All joints should be caulked and all caulking should be allowed to cure before applying ENESEAL® MP/HS.

Application - ENESEAL® MP/HS is ready to use, as supplied; however, the material should be stirred / agitated before application. Thinning or adding any other material is neither required nor recommended. ENESEAL® MP/HS should be applied to horizontal surfaces in a single light coat without soaking. Surface puddles should be avoided. Any ENESEAL® MP/HS that puddles on the surface should be re-distributed to another area or wiped off immediately.

ENESEAL® MP/HS may not be suitable for all masonry surfaces such as gypsum, some types of natural stone and sealed or painted surfaces. In addition, some surfaces may darken slightly due to the density / porosity / texture of the substrate. In such situations, a test application should be carried out in a relatively unnoticeable area.

Do not apply ENESEAL® MP/HS in direct sunlight when temperatures are over 90° F / 32° C. Do not apply if the temperature is below 35° F / 1° C, or if frost or ice is present.

Keep overspray off surrounding surfaces and away from plants and shrubbery.

Cleaning Equipment - Clean tools, equipment and overspray, while wet, with warm soapy water. Dried residue can be cleaned with solvents such as mineral spirits or alcohol.

Health & Safety - Every effort is made to insure that ENECON® Products are as simple and safe to use as possible. Normal industry standards and practices for housekeeping, cleanliness and personal protection should be observed. Please refer to the detailed SAFETY DATA SHEET (SDS) supplied with the material (also available on request) for more information.

Technical Support - The ENECON® engineering team is always available to provide technical support and assistance. For guidance on difficult application procedures or for answers to simple questions, call your local ENECON® Fluid Flow Systems Specialist or the ENECON® Engineering Center.



All information contained herein is based on long term testing in our laboratories as well as practical field experience and is believed to be reliable and accurate. No condition or warranty is given covering the results from use of our products in any particular case, whether the purpose is disclosed or not, and we cannot accept liability if the desired results are not obtained.

Copyright © 2016 by ENECON® Corporation. All rights reserved. No part of this work may be reproduced or used in any form or by any means - graphic, electronic or mechanical including photocopying, recording, taping or information storage and retrieval systems - without written permission of ENECON® Corporation.